



ЭЖЕКЦИОННЫЕ ДОВОДЧИКИ –
ВЫСОКОЭФФЕКТИВНАЯ ЭНЕРГОСБЕРЕГАЮЩАЯ
КЛИМАТИЧЕСКАЯ СИСТЕМА

50 !

1.

2.

3.
50

40 60 °

4.

5.


6.

7.

3-5

3



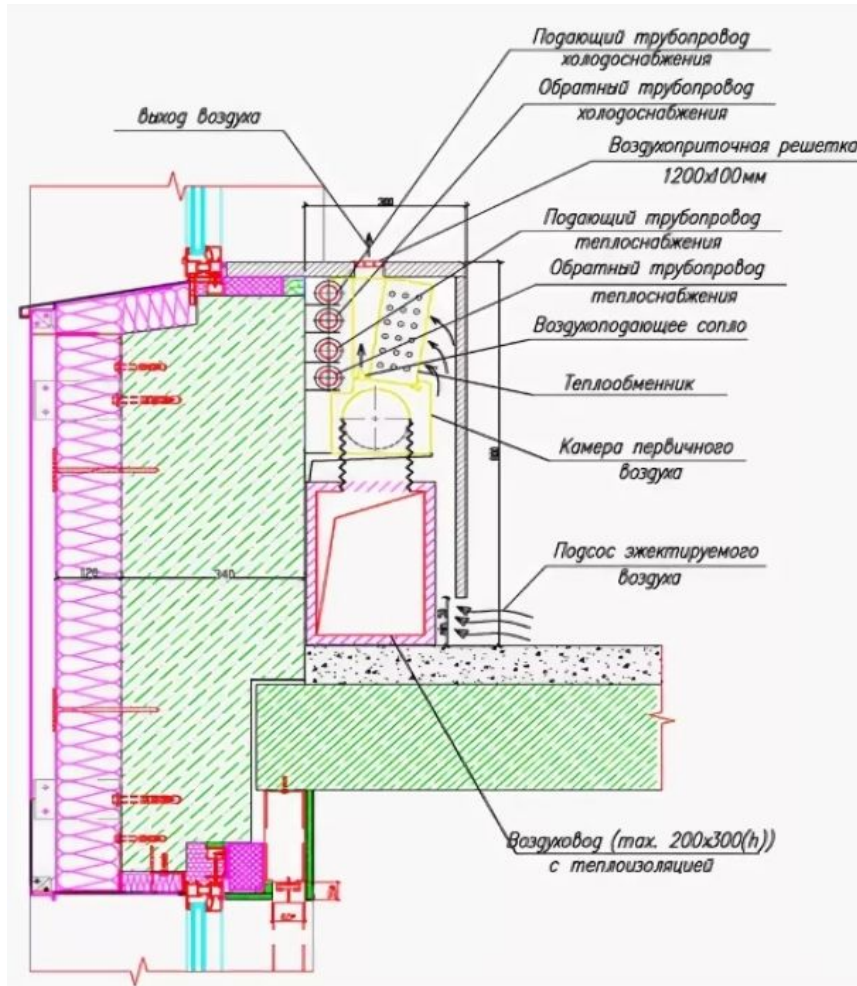

()

/

+15°


4-

/





1200 2900 ;
 3 200 ;
 3 500 ;
 60 450 ^{3/} ;
 Ø 100-160 ;
 165-265 , 598-900 ;

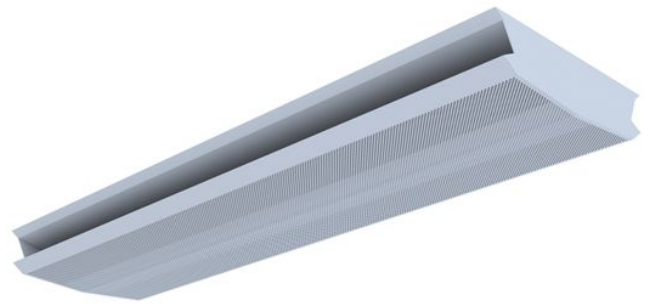

600 2900 ;
 3 200 ;
 3 500 ;
 60 450 ^{3/} ;
 Ø 100-160 ;
 165-265 , 598-900 ;



600 1800 ;
 2 600 ;
 5 000 ;
 60 300 ^{3/} ;
 Ø 100, 125, 160, 200 ;
 450-470 , 220-270 ;



1000 3000 ;
 2 600 ;
 5 000 ;
 60 300 ^{3/} ;
 Ø 100, 125 ;
 180-250 , 420-590 ;






Сенсорный пульт с датчиками t °C



Датчик движения или ключ-карта

Контроллер с
возможностью
подключения
неограниченного
количества устройств



Датчики конденсата,
протечки ,влажности,
температуры, давления



Клапана с приводом
0-10В , on/off



Воздушные заслонки с
электро-приводом



3-Скорости вращения
вентилятора



	1430-2500	600-2600
	2020	5000
	130	80 - 350
	7/12	14/19
	80	40 60
	565*220*632	1600*230*420
	30-40	20-35
	50	0
	+	-
	+	-
	5-7	20-50
	12-16	17-20
Modbus -	-	+
1		
	400	920
32,6 .	50	0
	200	200
+	150	350
	800	1470

/					
	,
15 .. / 1 3	5	35	7	0	0
5 .. 10 / 1	50	350	7	10	70
1 / 30 ..	30	210	7	0	0
14 (0,06 ..)	15	105	7	0	0
	100	700	7	10	70

